


TOP BEND NEON FLEX



Bending



Correct

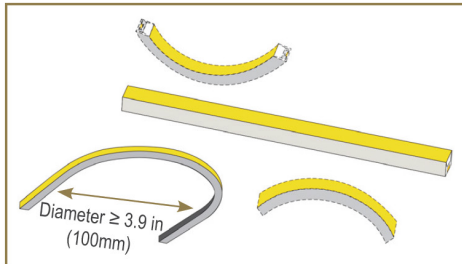

Incorrect

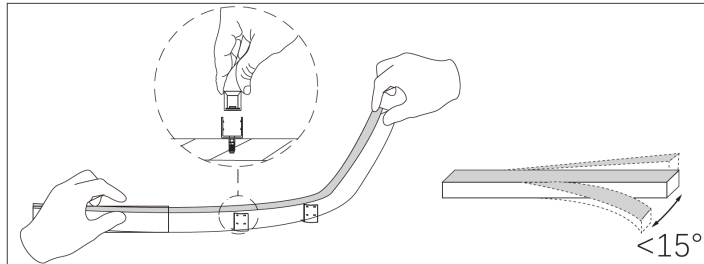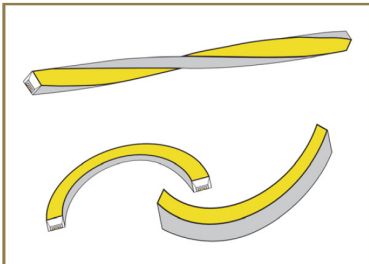


SIDE BEND NEON FLEX



Bending



Correct

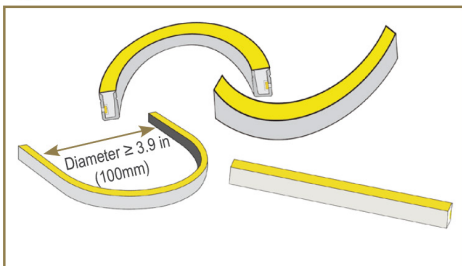

Incorrect

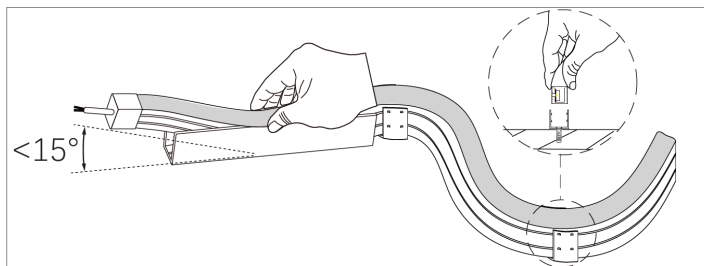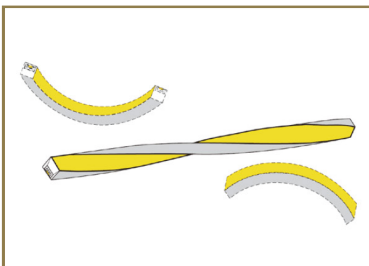

- Leads are securely soldered onto fixture.
Take caution not to pull out.
- Beginning and end are silicone-sealed.
Adding additional silicone to the lead side, once installed, is recommended due to flexing during installation.
- Track and clips should be secured with stainless screws if mounting outside.

