


NLE1515SBNF - Side Bend Neon Flex

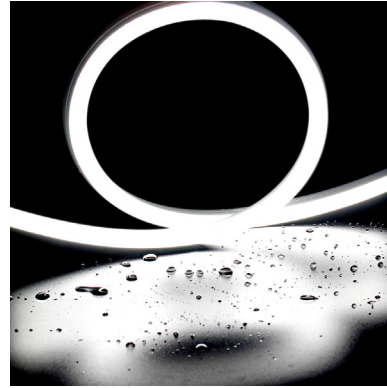


Features

- Even illumination
- Flexible FPC/PCB
- Anti-UV rated
- Standard reels or factory custom lengths
- End or side feed
- Three-year warranty

Technical Data

Input Voltage:	24VDC
Power:	4.4 w/ft (14.4 w/m)
LED Type:	SMD2835
LED Quantity:	42/ft (140/m)
Available CCT:	2700K / 3000K / 3500K 4000K / 5000K / 6000K
Lumens:	261-297 l/ft (856-973 l/m)
Light Transmittance:	50%
CRI:	80+ / 90+
Beam Angle:	115°
IP Grade:	IP67
Anti-UV Grade:	UVA-340
Cut Length:	0.16 ft (50 mm)
Max. Run Length:	16.4 ft (5 m)
Bend Diameter:	≥ 3.9 in (100 mm)
Operating Temperature:	-20°C ~ 45°C
Storage Temperature:	0°C ~ 60°C

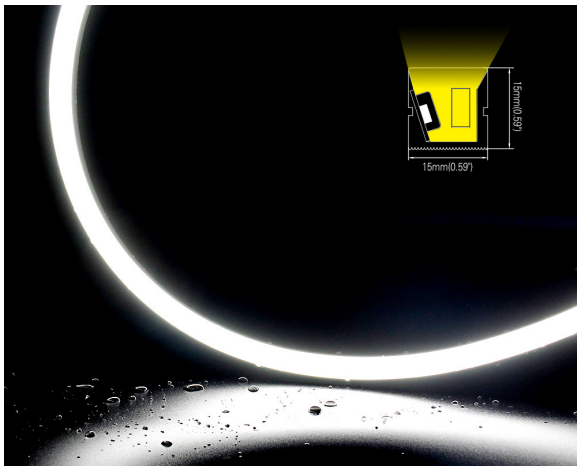

How To Order

NLE	1515SBNF	Length (in)	CCT	Wire Exit 1	Wire Exit 2	Mounting
NLE	1515SBNF	XXX	XXXX	X	X	C

NLE Neon Flex has simple model numbers. Each model number clearly identifies the length, CCT, wire exit and mounting.

2700 4000
3000 5000
3500 6000

E = End
S = Side
N = No Hole


E = End
S = Side
N = No Hole

C = Clip





NLE1515SBNF - Side Bend Neon Flex

Dimensions

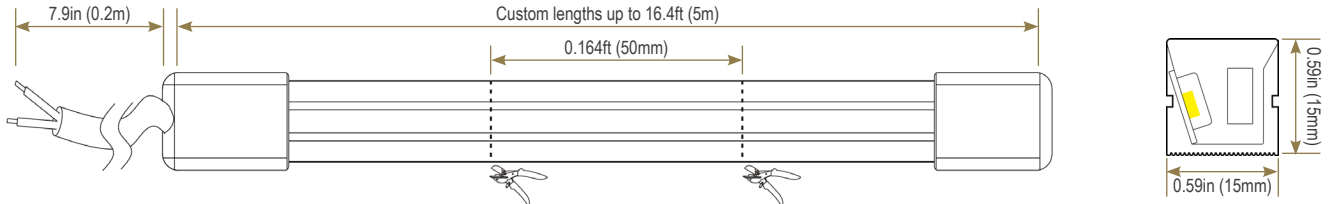


End Caps

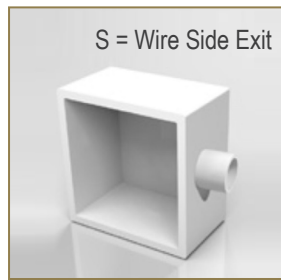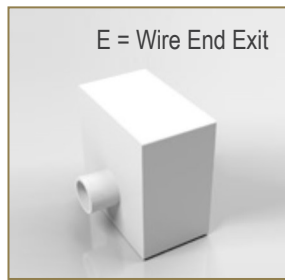


Bending



Correct

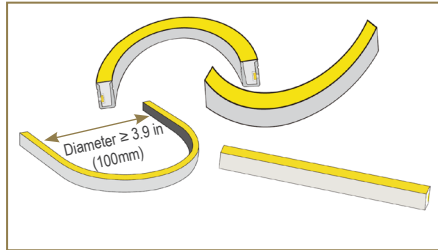


Incorrect

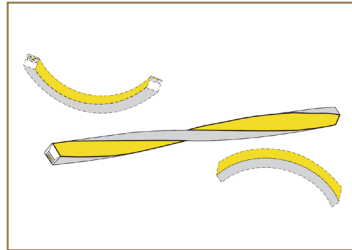


Cutting



Correct

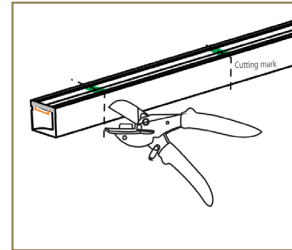

Incorrect

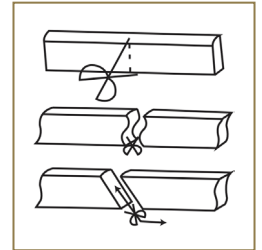

Mounting

